



BREAK

DEMOLITION CLAMP



1t 85t

1

WARRANTY

New




- High closing force (27 tons to 45 tons)
- Low weight for use with 15 kg (15 ton) excavators
- Booster system for model 3,5 to 9 tons
- Mechanical 360° rotating head
- Demolition for brick walls, concrete, buildings, stairs, pillars and beams (hardox)
- Equipped with knives for cutting rods and round bars
- Adjustable jaws for model 1,5 to 3,5 tons

The irresistible

Break is the ideal tool for interior demolition work, reinforced concrete columns.

Thanks to their small size, low weight and high power, these clamps can be mounted on mini-excavators to access confined areas and demolish reinforced concrete walls up to 400 mm thick.

TECHNICAL FEATURES

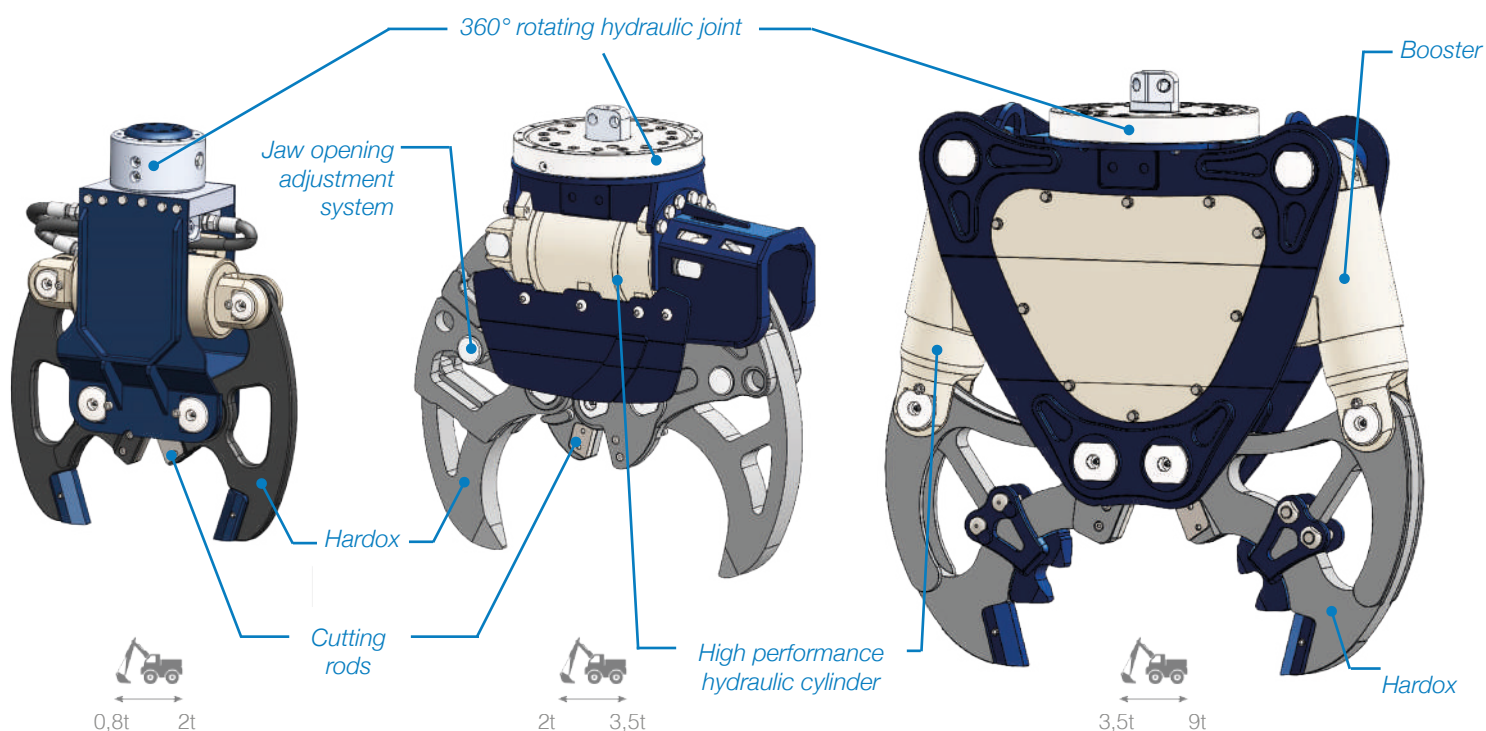



FOCUS ON The booster



- ✓ Booster act as **pressure intensifiers**, increasing the pressure in the system, thus giving a higher output pressure than the input pressure. They also compensate for any pressure loss on the mini-excavator side.
- ✓ The **compact** design of the booster needs minimal space and it is easy to integrate in clamp.




SAFETY QUESTION




Thanks to the low inlet pressure, you can eliminate expensive pipes, hoses and valves specifically for **high pressure**. This allows you to **use the mini-excavator system without any modifications**.



A version that can be **adapted** to the situation

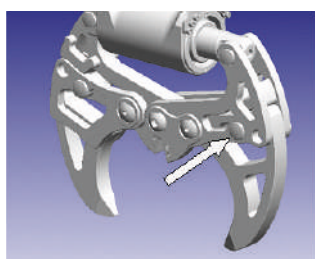

Position 1

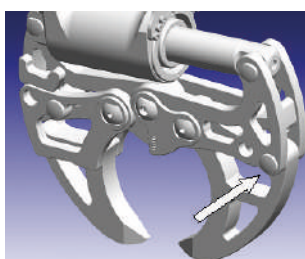

Position 2

The equipment consists of :

- ✓ Two jaws with adjustable opening in 2 positions :
 - **Position 1**, for brick walls, concrete..up to 435mm
 - **Position 2**, for thinner walls up to 250mm

INAVILABLE WITH




KLAC SYSTEM



ALTERNATIK



THE RANGE **BREAK** Demolition clamp



Model C / 0
(Mxs of 0,8 to 2)

Model D / 1
(Mxs of 2 to 3,5t)

Model E / 2
(Mxs of 3,5 to 5t)

Model F / 3
(Mxs of 6 to 9t)

	Weight kg	Flow Max/min l/min	Max tip distance mm	T. cycle sec	Strenght of jaw ton
Model C / 0 (Mxs of 0,8 to 2)	90	36	270	5,4	23
Model D / 1 (Mxs of 2 to 3,5t)	159	100	435	7,0	34
Model E / 2 (Mxs of 3,5 to 5t)	245	100	430	5,5	45
Model F / 3 (Mxs of 6 to 9t)	245	100	430	5,5	45



Klac industrie

Klac industrie S.A.
288, rue des Saules
Z.A Orléans Sologne
Saint-Cyr-En-Val
45075 Orléans
Cedex 2 France

Tél. (33) 2 38 49 82 82
Fax (33) 2 38 49 82 83

contact@klac-industrie.com

www.klac-industrie.com