





- · Anti-abrasion steel teeth.
- Reinforced construction for troublefree
- Simple tips or fitted with keyed teeth.
- · Designed specifically to suit the geometry of the machine.

THE **CUSTOMISED RIPPER**

We build the FLEKO you need: you can select the width, the number of rippers, whether or not they are fitted with teeth, etc.

Accessory used to remove rocks, remove roots, gather rubble, sort stones, etc.

INVAILABLE WITH










THE RANGE Multi ripper FLEKO

	Ref	Width W mm	Nr Teeth	Weight*	Height H mm
Model C / 0 (Mxs of 1,5 to 2t)	YFC4-040-03AA1B	400	3	60	450
Model D / 1 (Mxs of 2 to 3,5t)	YFD3-050-03AA1B	500	3	75	620
Model E / 2 (Mxs of 3 to 5t) Model F / 3 (Mxs of 6 to 9t)	YFE4-060-04AA1B	600	4	95	650
	YFF4-080-05AA1B	800	5	130	700






^{*}Weight without couplers and without teeth.





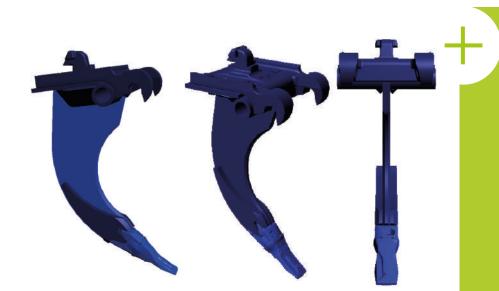

- · High yield-strength steel body.
- · Anti-abrasion steel reinforcements.
- Reinforced quick-connect coupler bracket for improved strength and durability.
- · Fitted with an interchangeable, keyed

THE SOLO RIPPER


Accessory used for demolition and riprap work suitable for the size of your machine. Ideal for working hard, rocky ground, removing tree stumps, etc.

ALTERNATIVE: the Klac marguerite SOLO, the tool holder which can be fitted with a ripper tooth (or a bucket, rake, clay blade, root cutter, etc.)





THE RANGE ROCK Ripper tooth



Model C / 0 (Mxs of 1,5 to 2t)
Model D / 1 (Mxs of 2 to 3,5t)
Model E / 2 (Mxs of 3 to 5t)
Model F / 3

(Mxs of 6 to 9t)

Type	Weight*	Height H	Thickness	Width K/W
	kg	mm	mm	mm
YDX45AG2CB	24	450	20	200/60
YDX50AG2DB	31	500	20	230/60
YDX55AG2EB	60	550	25	270/85
YDX60AG2FB	85	600	25	330/100

^{*}Weight without couplers and without teeth.





Klac industrie S.A. 288, rue des Saules

Z.A Orléans Sologne Saint-Cyr-En-Val 45075 Orléans Cedex 2 France

Tél. (33) 2 38 49 82 82 Fax (33) 2 38 49 82 83

contact@klac-industrie.com