

1
WARRANTY

PompK

HYDRAULIC IMMERSION PUMP




- Unmatched weight/dimensions power ratio
- Water displacement up to 8000 L/min
- Can pump very muddy water
- Can grind solid objects
- Can access deep water, even on very uneven ground
- Requires only minimum maintenance
- Operates with pressure up to 350 bar

POWER IN IMMERSION

Our pumps are simple and quick to install and use. Direct mounting using the quick-connect coupler and connection to the machine's existing circuit.


They use the immense hydraulic power of the machines, transforming them into **highly efficient** pumps. Their incredible power makes them ideal for all pumping operations involving **large volumes of water**.

TECHNICAL FEATURES

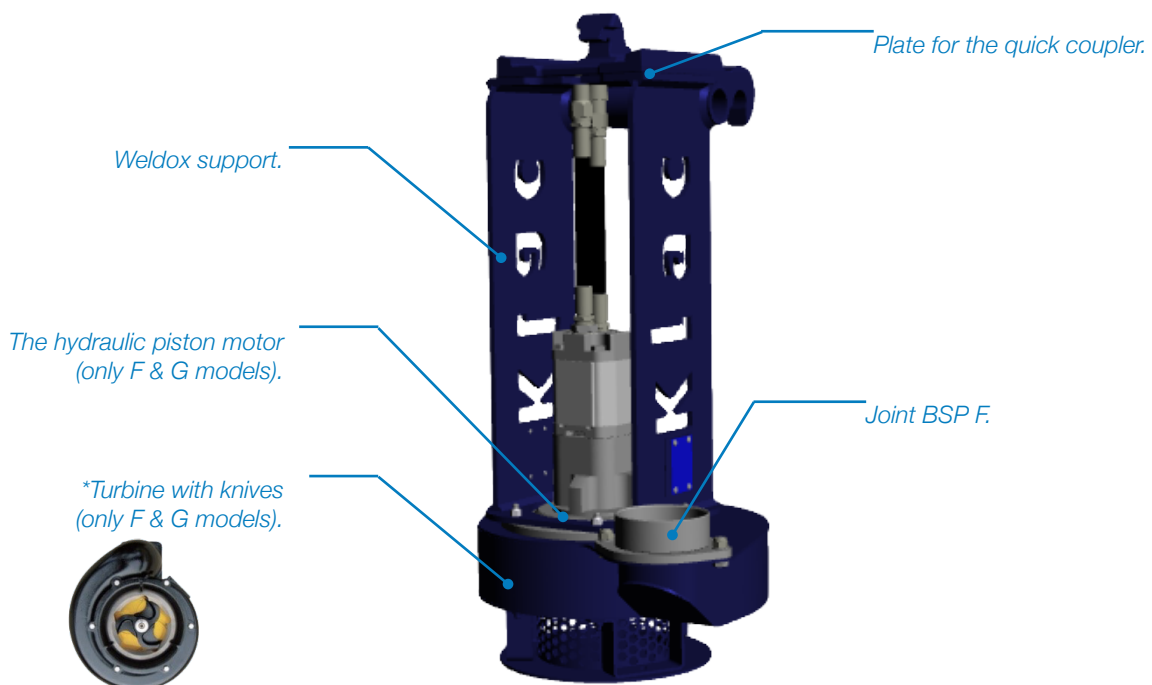



FOCUS ON The pump body

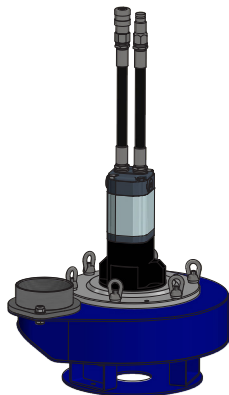


The body is made of **stainless steel**, with polyester polyurethane shims. These materials provide **unbeatable strength and resistance** to abrasion, impacts and rust.

The pumping chamber can be easily opened for inspection and cleaning.

The knife turbine (available on the F and G models) can chop weeds, seaweed, rags, ropes, twigs, etc.



Can **run dry indefinitely** without any damage.

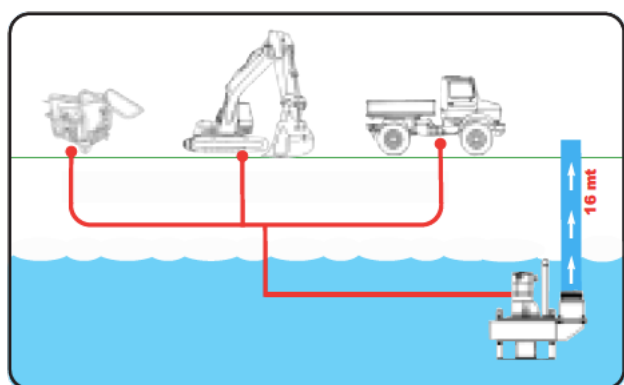

Immersion to a depth of

16 m (mod D & E)

29 m (mod F)

39 m (mod G)

50 m (mod C)



SAFETY QUESTION

Hydraulique 100% operation. No risk of electric shock, even in wet or submerged environments.

Direct connection to the machine's hydraulic circuit. No adjustment or modification of the hydraulic system required.

Anti-return valve on the motor prevents leaks in case of incorrect connection.

AVAILABLE WITH



KLAC SYSTEM



KLAC +



ALTERNATIK



THE RANGE POMP_K Immersion pump

Model C / 0
(Mxs of 0,8 to 2t)

Model D / 1
(Mxs of 2 to 3,5t)

Model E / 2
(Mxs of 3,5 to 5,5t)

Model F / 3
(Mxs of 5,5 to 8t)

Model G
(Mxs of 8 to 12t)

Weight kg	Dimensions W x H mm	Water flow rate L / min	Discharge opening	Max solid Ø cm	Pressure bar
34	370 x 350	1 600	3" BSP F	5	100 - 210
57	400 x 500	3 000	4" BSP F	7	140 - 210
76	400 x 500	3 000	4" BSP F	7	140 - 210
175	500 x 800	5 500	5" BSP F	5,5	150 - 350
215	550 x 900	8 000	6" BSP F	6,5	150 - 350



Klac industrie

Klac industrie S.A.

288, rue des Saules
Z.A Orléans Sologne
Saint-Cyr-En-Val
45075 Orléans
Cedex 2 France

Tél. (33) 2 38 49 82 82

Fax (33) 2 38 49 82 83

contact@klac-industrie.com

www.klac-industrie.com