



1
WARRANTY

WoodK

WOOD CLAMP



- High-strength steel blades
- Flange rotor
- Self-lubricating bushes
- One-piece weld-free body reinforced by an additional plate
- Over-sized tube : improved robustness and reliability over time
- Reinforced shaft retainers

GET TO GRIPS WITH IT !

The Klac wood clamp is designed and constructed to offer better-than-market services. It is manufactured using high-quality materials, thus considerably reducing wear costs.

Thanks to the use of improved seals and cylinders, the maximum operating pressure is increased to 250 bar (as compared to 200 bar for other clamps) to avoid having to adjust the machine's hydraulics. By adopting these seals, the performance and efficiency of the equipment is increased over time.

TECHNICAL FEATURES



The rotor is connected to a vertical shaft and is not fixed to the chassis on the 0.8–2 t model.


Flanged rotor on models ranging from 2 to 12 tonnes.

Tube with increased thickness.



Reinforced shaft retainers, screws and self-locking bolts.

Superior clamp thickness.

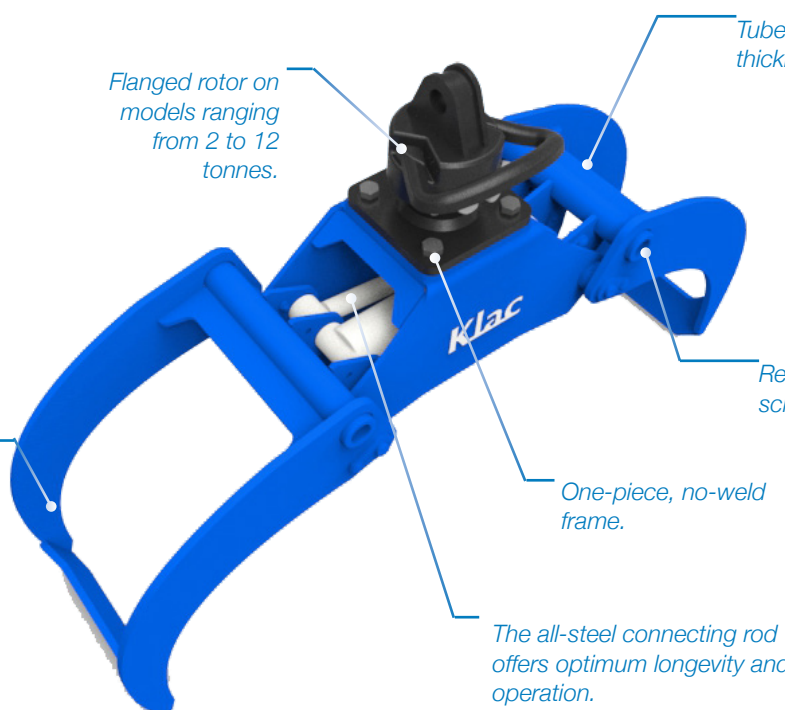

One-piece, no-weld frame.

The all-steel connecting rod offers optimum longevity and operation.

FOCUS ON
The rotor



Unlimited rotation, 2-year warranty.

- We only use high-quality rotors on the entire series.
- All the rotors used on Klac clamps are flanged to ensure robustness and reliability under all working conditions.

Made to last



SAFETY QUESTION

The check valve as standard on all the models and the over-sized cylinder allow the clamp to work at pressures up to 250 bar without affecting the machine's hydraulic system, thus eliminating oil leaks due to overpressure.

The clamp is always held in the right working position thus eliminating the need for adjustment and tightening operations.


- ✓ Check valve as standard.
- ✓ Self-lubricating steel bushes.
- ✓ Reinforced shaft retainers.

AVAILABLE WITH

KLAC SYSTEM **K⁺ KLAC +** **A_K ALTERNATIK**



THE RANGE WOODK clamp

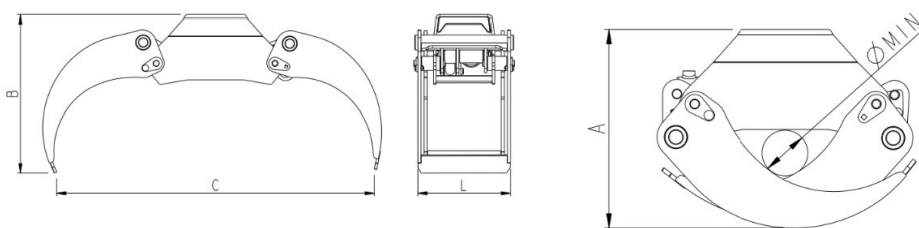

Weight clamp kg	Weight rotor kg	Capacity kg	Ø mm	A mm	B mm	C mm	L mm	Pressure bar	
Model C / 0 (Mxs of 0,8 to 2t)	60	10	1 000	70	385	510	1 000	315	230
Model D / 1 (Mxs of 2 to 3,5t)	80	15	1 900	70	420	560	1 100	340	230
Model E / 2 (Mxs of 3,5 to 5,5t)	130	15	2 200	100	499	660	1 400	410	230
Model F / 3 (Mxs of 5,5 to 8t)	175	45	2 600	130	570	660	1 500	420	230
Model G (Mxs of 8 to 12t)	300	70	3 800	130	700	880	1 800	645	230



Klac industrie

Klac industrie S.A.
288, rue des Saules
Z.A Orléans Sologne
Saint-Cyr-En-Val
45075 Orléans
Cedex 2 France

Tél. (33) 2 38 49 82 82
Fax (33) 2 38 49 82 83

contact@klac-industrie.com

www.klac-industrie.com